

Product Introduction

NRW200/265/300 series air compressor has relatively light weight and small size which allows mobility and portability. It's equipped with two filling hoses and two filling valves, which can simultaneously inflate two cylinders to improve efficiency. It's applicable for use in firefighting, diving, chemical, mining, rescue, etc. This series can be driven by three-phase motor or gasoline engine to meet different application needs.

Features

- Air quality conforms to EN12021
- CE, CCS, ISO9001 certificates
- 3 stage compression design
- Intelligent digital pressure controller for automatic start/stop
- The motor has overload, overheating and low voltage protection
- Providing 225 Bar/330 Bar filling pressure for options
- Cooling method: air cooling
- Automatic timing for working
- Automatic stop is equipped
- Automatic start is optional
- Automatic condensate drain is optional




Technical Data

| Model | NRW200 | NRW265 | NRW300 |
|-----------------------|-----------------------|-----------------------|-----------------------|
| Charging rate (L/min) | 200 | 265 | 300 |
| Max. pressure (bar) | 225 / 330 | 225 / 330 | 225 / 330 |
| Number of stages | 3 | 3 | 3 |
| Drive | Three-phase 380V,50HZ | Three-phase 380V,50HZ | Three-phase 380V,50HZ |
| Speed (rpm) | 1300 | 1450 | 1600 |
| Power (kw) | 4.0 | 5.5 | 5.5 |
| Horse (hp) | 5.5 | 7.5 | 7.5 |
| Weight (kg) | 118 | 118 | 118 |
| Dimension (mm) | 850*490*620 | 850*490*620 | 850*490*620 |
| Air supply interface | G5/8" | G5/8" | G5/8" |

Note: Motors with different voltages of 50HZ or 60HZ can be customized.

Standard Configuration

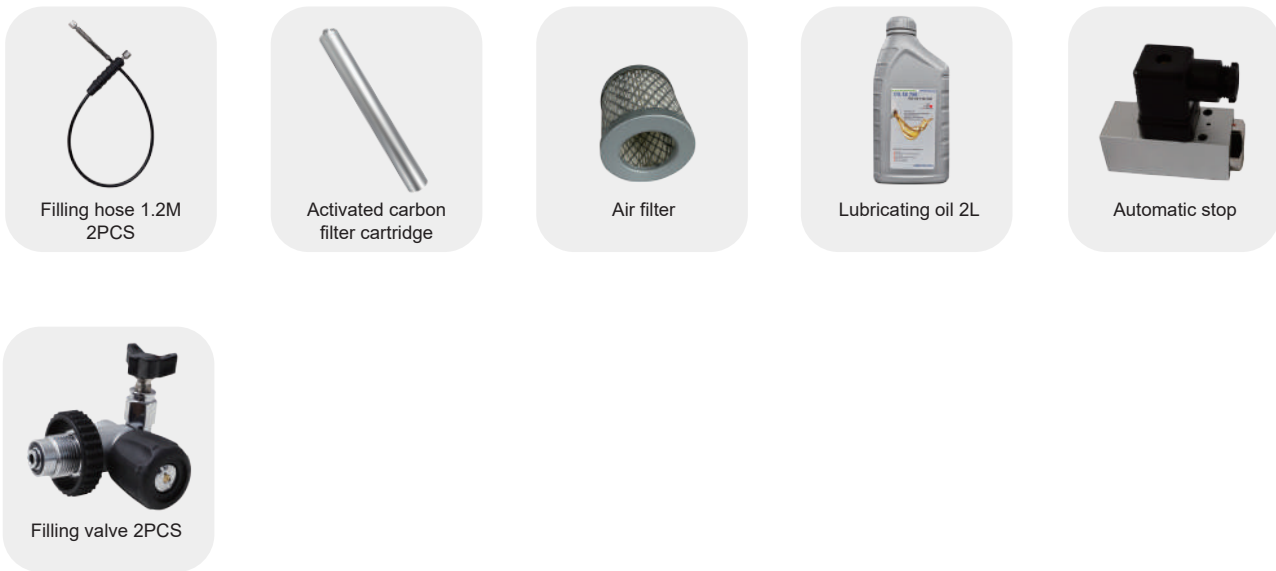

Optional Configuration



Product Details

